

# Universal NUTLOC™ Fittings

Connecting drip tubing or dripline of diverse dimensions



## Versatile DIG NUTLOC™ Fittings Simplify Drip Tubing & Dripline Connections Across Sizes

DIG's Universal NUTLOC™ Drip Fittings provide a flexible way to connect various drip tubing and dripline sizes (1/2" to 5/8"). Designed for commercial, residential, and agricultural use, these durable, UV-protected plastic fittings offer secure connections without requiring exact measurements.

### Features

- Compatible with .530, .600, and .620 ID drip tubing and dripline (equivalent to .630 to .710 OD, or 16, 17, and 18 mm) with a wall thickness between .040" to .050" (1.02 mm to 1.27 mm).
- Available in various configurations, including couplings, tees, and elbows, with optional 3/4" swivel hose or pipe threads, screens, or washers.
- Reusable fittings for extended life; easily removable and reusable.
- Two-part design with threaded nuts and barbed body, available with or without a swivel thread.
- Resistant to common fertilizers used in residential and commercial applications.
- Constructed from high-impact, UV-resistant plastic for durability in harsh environments.
- Suitable for above-ground or subsurface installation.



**DIG Corporation**

1210 Activity Drive  
Vista, California 92081  
[www.digcorp.com](http://www.digcorp.com)

800.322.9146  
760.727.0914  
fax 760.727.0282



# Universal NUTLOC™ Fittings

Connecting drip tubing or dripline of diverse dimensions


## Specifications

- Operating Pressure:** Up to 60 PSI
- Color:** Black body with brown threaded nuts
- Compatibility:** For use with 1/2" to 5/8" drip tubing or dripline
- Material:** Polypropylene used for both the barbed body and nut

DIG's Universal NUTLOC™ fittings are used to connect drip tubing and dripline to water sources, create branching lines, or link different tubing types. They are crucial for customizing and securing drip irrigation systems, offering a simple, reliable, and flexible solution.

## Key Advantages

- Universal Compatibility:** These fittings work with all standard drip irrigation tubing, dripline and emitters, making them a versatile solution for any system.
- Easy Installation:** No special tools or skills are required—simply push the tubing into the fitting and hand-tighten the nut for a secure connection.
- Strong Hold:** The nut lock design ensures a leak-free connection that resists vibration and movement, keeping your system stable even in challenging conditions.
- Versatility:** Available in a variety of configurations, these fittings are suitable for a wide range of applications, from residential to commercial and agricultural systems.
- Reusability:** The fittings can be easily removed and reinstalled, allowing for easy modifications or expansions to your system.

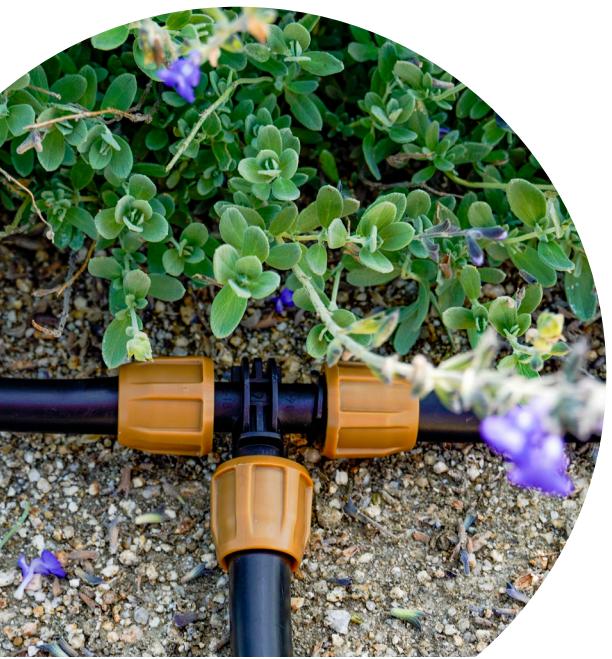

How to specify	
Universal NUTLOC™ Fittings	
15-070UNC	1/2" NUTLOC™ Coupling
15-071UNE	1/2" NUTLOC™ Elbow
15-072UNT	1/2" NUTLOC™ Tee
Universal NUTLOC™ 3/4" FHT Swivel	
15-073UNES	3/4" FHT NUTLOC™ Swivel Elbow with Screen
15-074UNTS	3/4" FHT NUTLOC™ Swivel Tee with Screen
15-075UNES	3/4" FHT NUTLOC™ Swivel Elbow with Washer
15-076UNTS	3/4" FHT NUTLOC™ Swivel Tee with Washer
Universal NUTLOC™ 3/4" FPT Swivel	
15-077UNES	3/4" FPT NUTLOC™ Swivel Elbow with Washer
15-078UNTS	3/4" FPT NUTLOC™ Swivel Tee with Washer